

## **Casegood Finishes**



### **Accent Finishes**




- TFL suitable for all surfaces; HPL recommended for tops.
- Use casegood finishes to select coordinating edgebanding.

### **Metal Finishes**



Custom finishes available, subject to minimum order quantities and made-to-order timelines.

## **Stone Finishes**

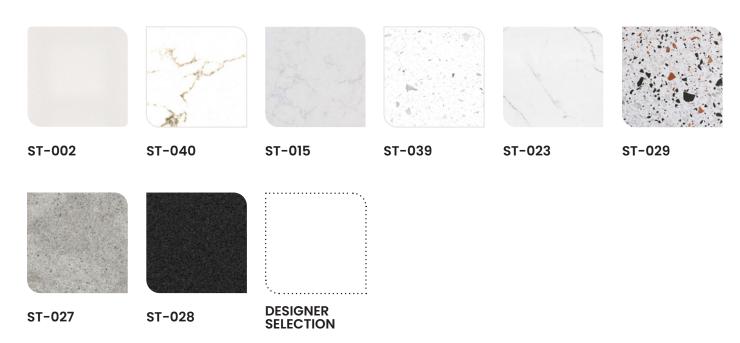

Custom finishes are available, subject to minimum order quantities and made-to-order lead times.

RESISTANCE	Stain resistant Scratch resistant Impact resistant
POROSITY	Non-porous - does not require sealing
MAINTENANCE	Low maintenance - clean with mild soap and water
HYGIENE	Hygienic surface – prevents bacteria and mold

**Pulls** 

ADA-compliant





PG1-170

Length: 10 9/16"

Finish: Grey Powder Coat



PG1-172

Length: 15 5/8"

Finish: Grey Powder Coat



PG1-171

Length: 10 9/16"

Finish: Black Powder Coat



PG1-173

Length: 15 5/8"

Finish: Black Powder Coat



PG1-142

Length: 5 1/4"

Finish: Brushed Nickel



PG1-152

Length: 5 1/4"

Finish: Black Nickel



PG1-104

Length: 4 1/2"

Finish: Nickel



PG1-110

Length: 4 1/2"

Finish: Black Nickel



PG1-180

Length: 7 3/4"

Finish: Grey Powder Coat



PG1-181

Length: 7 3/4"

Finish: Taupe Powder Coat



PG1-113

Length: 6 1/4"

Finish: Satin Nickel



PG1-111

Length: 13"

Finish: Satin Nickel

### **Pulls**

ADA-compliant





PG1-130

Length: 7 11/16"

Finish: Brushed Nickel



PG1-141

Length: 5 3/8"

Finish: Brass Powder Coat



PG1-121

Length: 14 1/4"

Finish: Black Powder Coat



PG1-106

Length: 5 1/4"

Finish: Satin Nickel

Classic configuration



PG1-116

Length: 11 3/4"

Finish: Aluminum



PG1-114

Length: 15 3/4"

Finish: Aluminum



PG1-163

Length: 1 9/16"

Finish: Black Matte

## Heritage



FIBER	100% Polyester
ABRASION	130,000 Double Rubs
CLEANING CODE	S
FLAMMABILITY	California Technical Bulletin 117-2013     UFAC Class 1     NFPA 260 Class 1

- Customer's own fabric selection (COM) is available.
- Inquire with your Foliot sales manager regarding process.
- In stock option.

## Zenith



FIBER	<ul><li>65% Polyurethane</li><li>25% Polyester</li><li>10% Viscose</li></ul>
ABRASION	130,000 Double Rubs
CLEANING CODE	w
FLAMMABILITY	California Technical Bulletin 117-2013     UFAC Class 1     NFPA 260 Class 1

- Customer's own fabric selection (COM) is available.
- Inquire with your Foliot sales manager regarding process.
- In stock option.

## **Other Textiles**



#### LINEN CASHMERE

FIBER	100% Vinyl
BACKING	100% Brushed Polyester Knit
ABRASION	110,000 Double Rubs
CLEANING CODE	ws
FLAMMABILITY	California Technical Bulletin 117-2013     NFPA 260 class 1



#### DESERT OAK

FIBER	100% Polyurethane
FINISH	Nanotex
ABRASION	200,000 Double Rubs
CLEANING CODE	WS
FLAMMABILITY	California Technical Bulletin 117-2013     NFPA 260 Class 1



#### TWEEDY

FIBER	100% Polyester
ABRASION	100,000 Double Rubs
CLEANING CODE	S
FLAMMABILITY	California Technical Bulletin 117-2013



### ASG ROLE TEXTURE

FIBER	100% Polyester
ABRASION	50,000 Double Rubs
CLEANING CODE	S
FLAMMABILITY	California Technical Bulletin 117–2013



### D-4185 FEATHER


FIBER	100% OLEFIN
ABRASION	60,000 Double Rubs
CLEANING CODE	WS
FLAMMABILITY	California Technical Bulletin 117-2013



#### **BAYOU**

FIBER	100% Polyester
ABRASION	80,000 Double Rubs
CLEANING CODE	S
FLAMMABILITY	California Technical Bulletin 117-2013

## **Other Textiles**



#### PORT OF SPAIN

FIBER	• 87% Polyester • 13% Acrylic
ABRASION	60,000 Double Rubs
CLEANING CODE	s
FLAMMABILITY	California Technical Bulletin 117-2013



#### VINYL COPPER

FIBER	• 80% Polyester • 20% Cotton
ABRASION	30,000 Double Rubs
CLEANING CODE	S
FLAMMABILITY	California Technical Bulletin 117-2013



#### VINYL STAR BRUSHED BRONZE

FIBER	• 80% Polyester • 20% Cotton
ABRASION	30,000 Double Rubs
CLEANING CODE	S
FLAMMABILITY	California Technical Bulletin 117–2013



#### FLORA ROSE

FIBER	• 81% Polyester • 19% Acrylic
ABRASION	65,000 Double Rubs
CLEANING CODE	s
FLAMMABILITY	California Technical Bulletin 117-2013



#### SKY CHEVRON

FIBER	100% Polyester
ABRASION	50,000 Double Rubs
CLEANING CODE	S
FLAMMABILITY	California Technical Bulletin 117-2013

### **Grommets**





## **Outlets**





BLACK WHITE

#### **SPECIFICATIONS**

INPUT VOLTAGE	120V AC	CORD LENGTH	6 ft (1.83 m)
TOTAL OUTPUT	15A	WALL PLUG ORIENTATION	90-degree space-saving plug
USB OUTPUT	1USB-A & 1USB-C	SAFETY FEATURES	Tamper resistant     Spill resistant
SURGE/OVERCURRENT PROTECTION	15A protection	CERTIFICATIONS	• UL STD 962-A, UL STD 1449 • CSA STD C22.2 No.308 & No.8







## **Manufacturing Locations**

made here. made smart.





**USA** 

CANADA

Las Vegas

7000 Placid Street Las Vegas, Nevada 89119

Montreal

721 Boulevard Roland-Godard Saint-Jérôme, Québec J7Y 4C1

1 (800) 545-5575 hospitality@foliot.com

foliot.com